




RELIABLE
RACING
ESTABLISHED 1965



— Pole Stopper

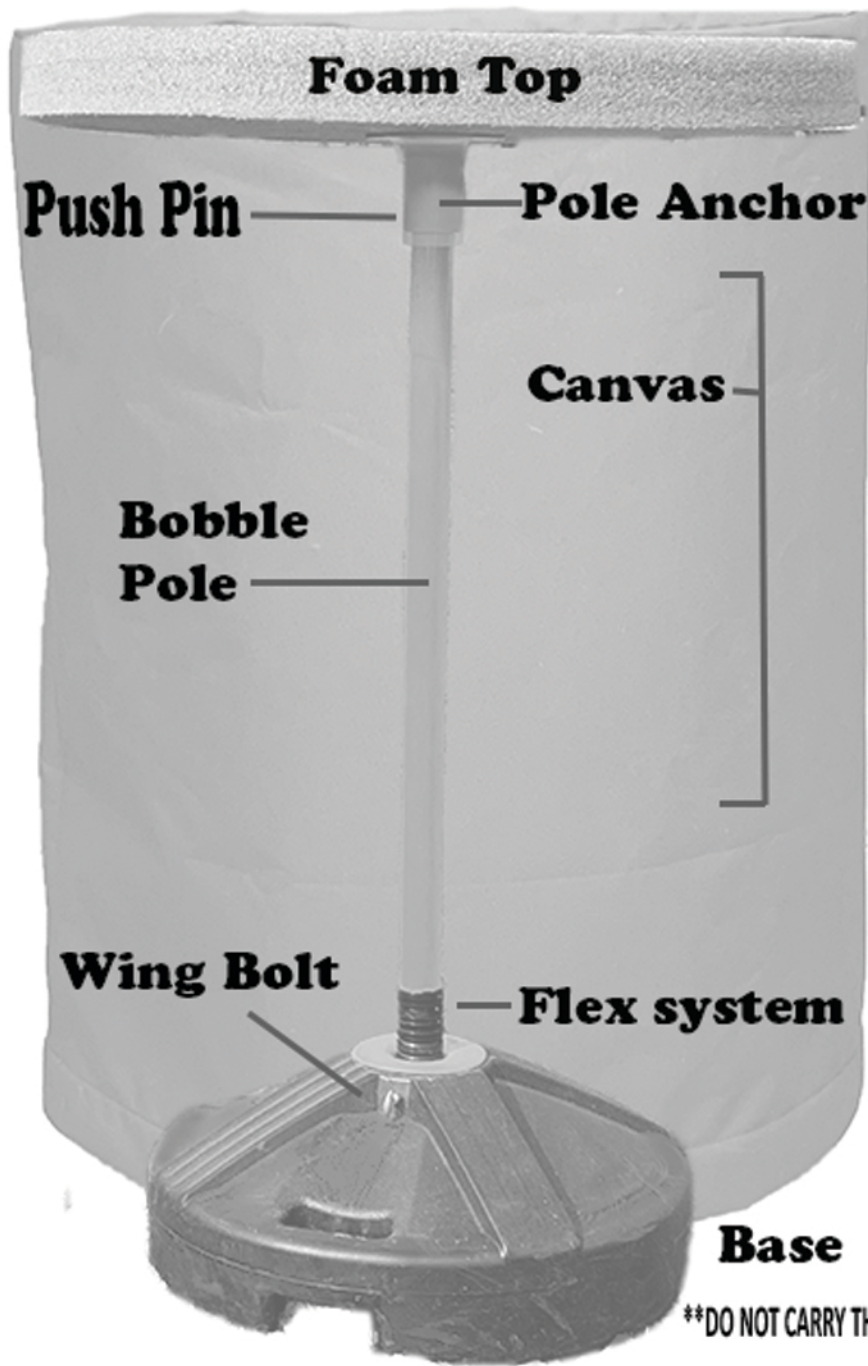

Step 1:
Put 20 to 25 pounds of sand or dirt into each base.

Step 2:
Secure the bobble pole to the base with the wing nut.

Step 3:
Make sure the pole anchor is secured with the push pin.

Step 4:
Set the foam top on top of the pole anchor

Step 5:
Drape the canvas over the foam top and have the top of the pole assembly extend out of the center hole at the top of the canvas.

Step 6: Press the pole stopper onto the top of the pole until it is securely snapped in place.

****DO NOT CARRY THE SYSTEM BY THE FOAM TOPS!**

Do not lose the pole stopper! Always put back in place to secure it when assembling or disassembling the bobble barrels.



Lay the foam and cover flat on a table.



Remove the cap assembly by pushing in the snap button.



Slide the pole through the center hole of the foam and cover.



Flip everything upside down and Release the wire lock clevis pin, then slide the stopper away from the foam roughly four inches.



Flip the everything back up and replace the top cap assembly. Make sure the snap button finds the hole in the tube



Flip everything upside down again, slide the stopper very tight against the foam until the Thru-holes line up, then and replace the wire lock clevis pin.



YOUR BOBBLE BARREL IS READY FOR ACTION!